

caroma®

| | | |
|--------|---------------|----|
| CI/SfB | (74.1) | g3 |
| Date | October, 2016 | |

Supersedes all previous issues

cube Invisi™ Series II Wall Hung Water Closet

**1.28/0.8 gpf (4.8/3 lpf) Dual Flush High Efficiency Toilet
with Cube Vitreous China Box Rim Closet Bowl
and Invisi II Tank for Inwall, Induct, Inceiling or Under
Counter applications**



HIGH EFFICIENCY TOILET
HET



Certified by
IAPMO R&T

c-UPC®

IAPMO listed for USA & Canada

Cube Invisi™ Series II Wall Hung Water Closet

1.28/0.8 gpf (4.8/3 lpf) Dual Flush HET with Cube Vitreous China Box Rim Closet Bowl and Invisi II Tank for Inwall, Induct, Inceiling or Under Counter applications



Cube Invisi™ II dual flush high efficiency toilet (HET) is suitable for inwall, induct, inceiling and under counter applications. The 1.28/0.8 gpf (4.8/3 lpf) matched performance suite with Caroma Invisi™ II system provides the latest water saving technology in sanitaryware. Featuring smooth sides and concealed plumbing fittings with projection from wall of 2 1/8" (550mm). Multiple button options are available to suit domestic and commercial applications. Concealed tank and plumbing deliver space savings, easy cleaning and matched performance. **Important:** The Cube Invisi™ II dual flush washdown toilet will comply with the Americans with Disabilities Act when installed to Easy Height Standards for Accessible Design, Section 4.16 Water Closets. Further reference must be made to the relevant sections of Easy Height Standards For Accessible Design with current amendments to determine clear floor space, grab bar, and operation requirements.

Closet Bowl: **Cube Wall Hung** 1.28/0.8 gpf (4.8/3 lpf) dual flush wall hung box rim closet bowl.
Outlet: P-trap only
Tanks: Caroma concealed tank options are available: **Invisi™ Inwall/Induct/Inceiling and Under Counter Tanks**
 Closet bowl 57 lbs (26 kg), tank/bracket 33 lbs (15kg)
Weight:
Fixing: **Closet bowl** – fixing bracket is supplied with the toilet, options include –
 Inwall bracket for concrete floors and stud walls, (D402) suitable for inwall, induct and inceiling applications.

Note: The bracket systems are suitable for installation only where non compressible wall materials are used.

Tank – the cistern and bracket for under counter or in inwall Invisi II systems are pre-assembled and are supplied with the flush pipe and a waste pipe suitable for installation in a 3 1/2" (90mm) cavity wall without venting and 7" (180mm) with venting. Structural brick wall systems require the cistern to be fixed to the wall. For in wall applications with raised height cisterns an extension kit is provided with the Invisi II remote mounting box kit. (Code No. 237006)

Seat: The following Caroma seat is recommended: **Cube Soft Close** seat.
Color: White.

Dimensions: All dimensions are in inches and millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.




HIGH EFFICIENCY TOILET
HET
 c-UPC®
 IAPMO listed for USA & Canada




| Cube Wall Hung Invisi II | Code No. |
|---|----------|
| Cube Wall Hung Closet bowl | 604300 |
| Inwall/Induct/Inceiling tank includes bracket | 237061 |
| or Under Counter tank includes bracket | 237062 |
| Cube soft close seat | 300024 |

Inwall Installation

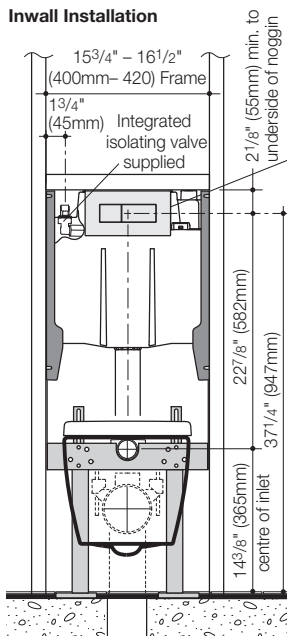

Note: access to cistern internals can be achieved through either front or top mount button plate option.

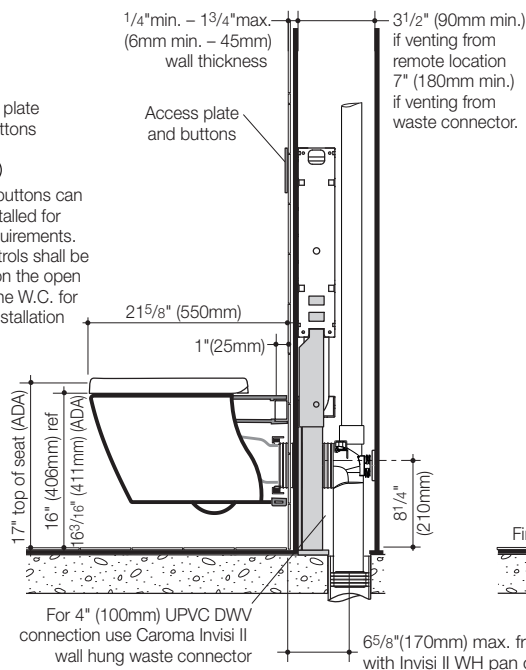

For 4" (100mm) UPVC DWV connection use Caroma Invisi II wall hung waste connector

Under Counter Installation

